RD3

ACCESSORY: RADOME, USED WITH SP3 PARABOLIC REFLECTOR ANTENNA

SPECIFICATIONS

General

Item	Accessory: Radome
Used With	SP3 parabolic reflector antenna

*Additional OEM interfaces and adapters may be available. Contact RadioWaves for a complete and current list of available adapters.

Electrical

Attenuation, 2 Ghz	0.2 dB
Attenuation, 5 Ghz	0.4 dB
Attenuation, 7 GHz	0.5 dB
Attenuation, 10 GHz	0.6 dB
Attenuation, 13 GHz	0.7 dB

Add to Antenna VSWR, Max, 2 GHz	0.02
Add to Antenna VSWR, Max, 5 GHz	0.02
Add to Antenna VSWR, Max, 7 GHz	0.02
Add to Antenna VSWR, Max, 10 GHz	0.03
Add to Antenna VSWR, Max, 13 GHz	0.04

Mechanical

Net Weight	9 lbs | 4 kg
Mechanical Configuration	RD

Operating Temperature Range	-40 to +60 C

Regulatory Compliance

RoHS-compliant	Yes


Shipping Information

Package Type	Cardboard
Gross Weight	9 lbs | 4 kg

Dimensions, L x W x H	37 x 37 x 13in | 94 x 94 x 33 cm
Shipping Volume	10.3 cu ft | 0.29 cu m

© RadioWaves, Inc. 2018. All Rights Reserved.

TECHNICAL DRAWINGS

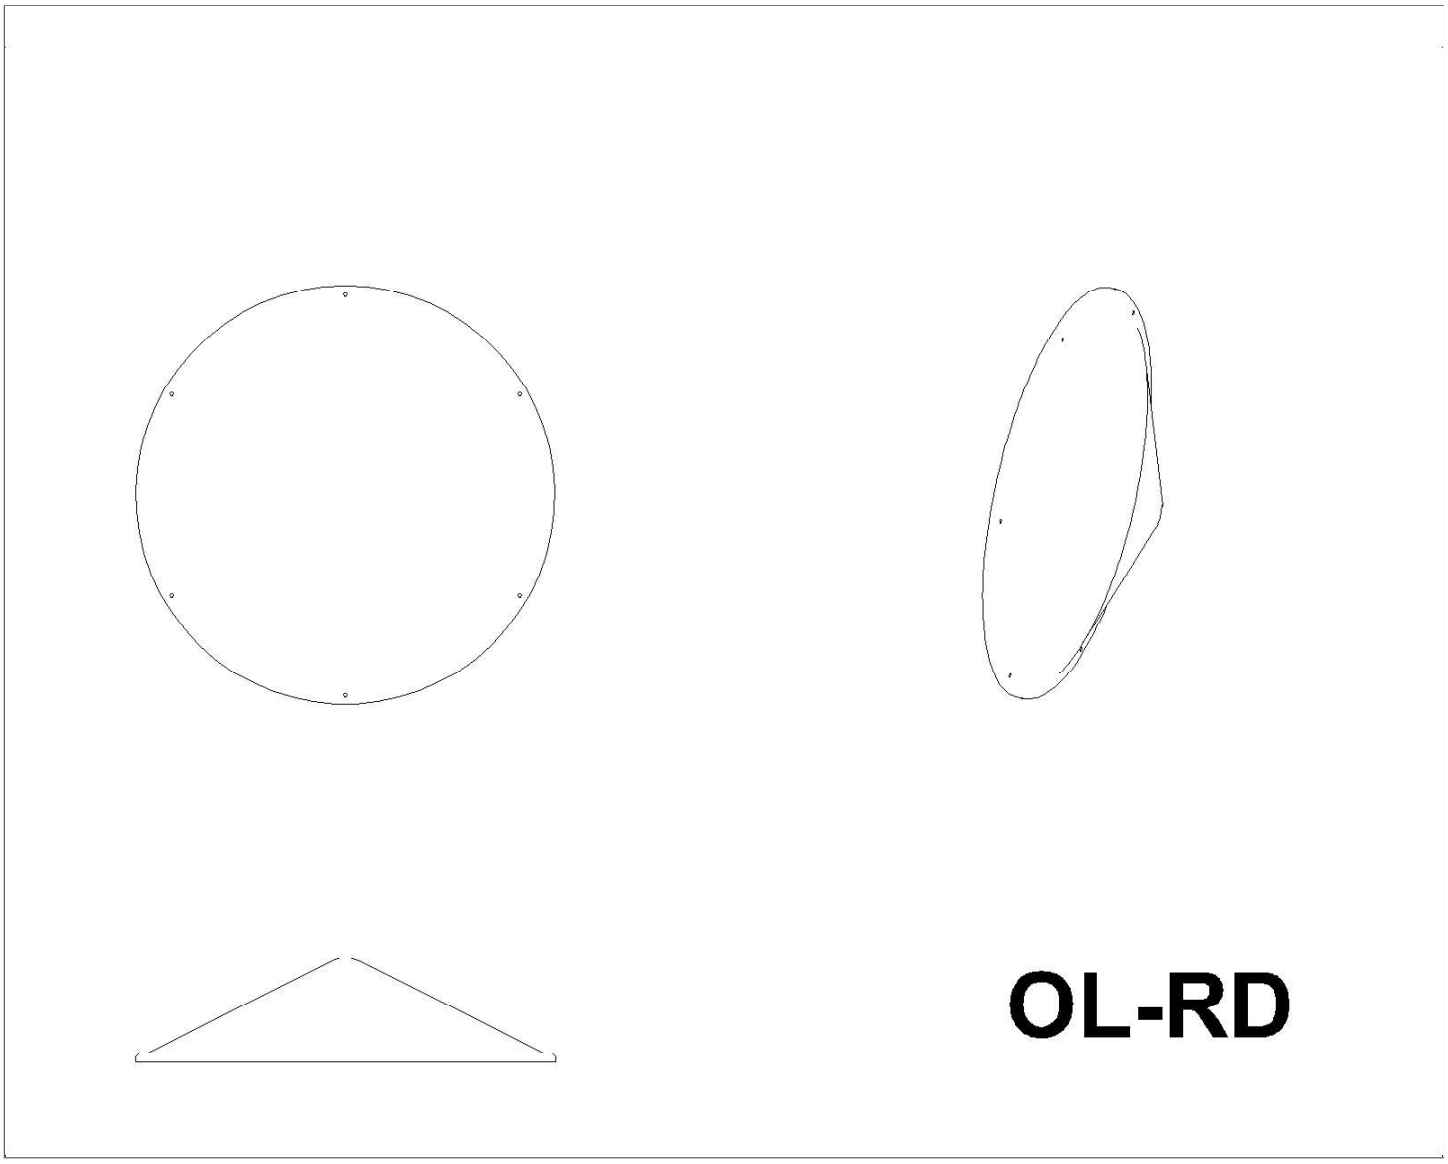

© RadioWaves, Inc. 2018. All Rights Reserved.